

Heat Pump HP-15 20 Litre

58998

Ready-to-use heat transfer fluid suitable for use in Air and Ground Source Heat Pumps

Provides frost protection to -15°C

Protects against corrosion, limescale and bacterial contamination

High performance, non-toxic formulation

Compatible with all materials commonly found in Heat Pump systems

pH stable product



A non-toxic, ready-to-use, inhibited heat transfer fluid for Air and Ground Source Heat Pumps. This product is designed to protect against corrosion, limescale and bacterial contamination, as well as frost protection to -15°C.

Application

Fernox HP-15 is ready to use. Do not dilute. Fernox HP-15 provides frost protection to -15°C. Existing heating systems should be cleaned of sludge and limescale deposits with a suitable Fernox Cleaner before adding Fernox HP-15.

Package, Handling & Safety

Fernox HP-15 is supplied in 25 litre drums.

Keep out of reach of children. Do not mix with other chemicals. For further information, please consult the Safety Data Sheet (SDS).

Specification

Composition: An aqueous solution of monopropylene glycol with specifically formulated inhibitors, stabilisers and biocides.

Odour: Characteristic

Form: Liquid

Appearance: Red liquid

S.G.: 1.03pH: 7.4

Boiling point: 101-105 deg C

Water content: 65-70%


Single Item

Height mm	365
Width mm	280
Depth mm	250
Weight kg	22.000
Barcode EAN	5014551589988


Outer Carton

Outer Height mm	890
Outer Width mm	800
Outer Depth mm	1200
Outer Weight kg	550.000
Transit Type	Euro 1200 x 800


Specific Heat Temperature

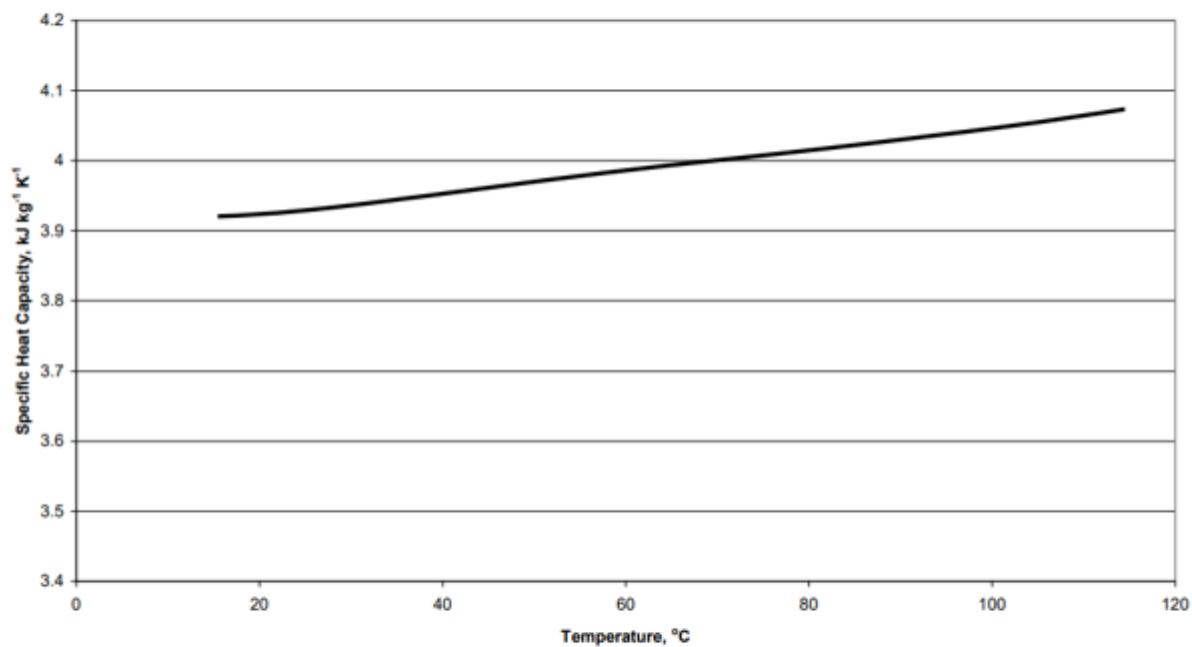

Viscosity Temperature

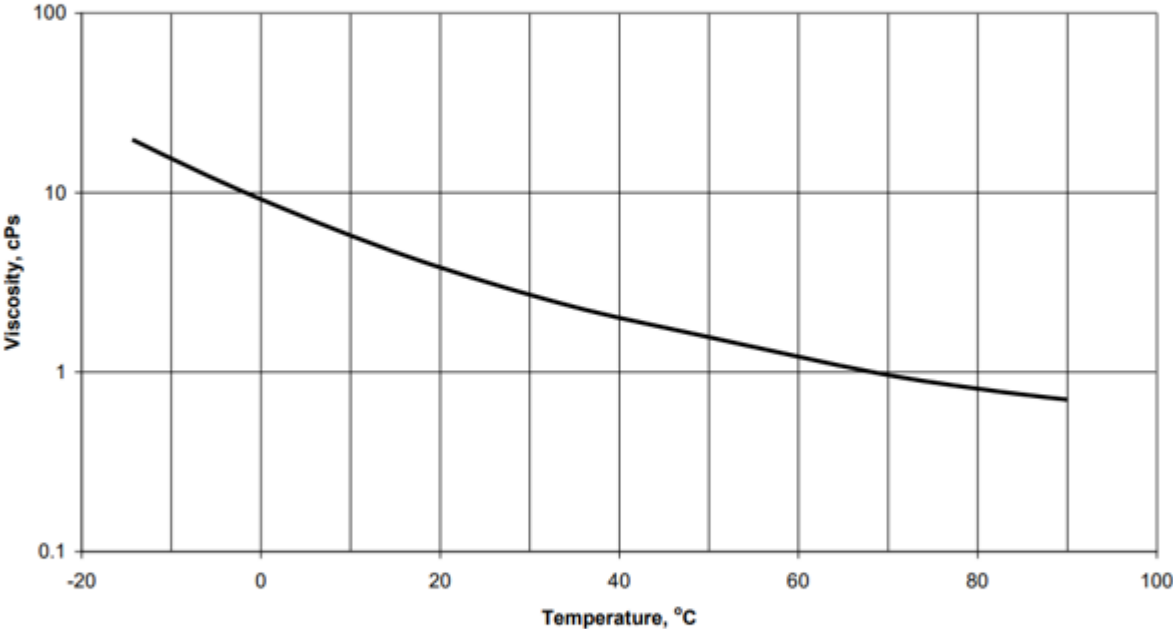

Frost Protection

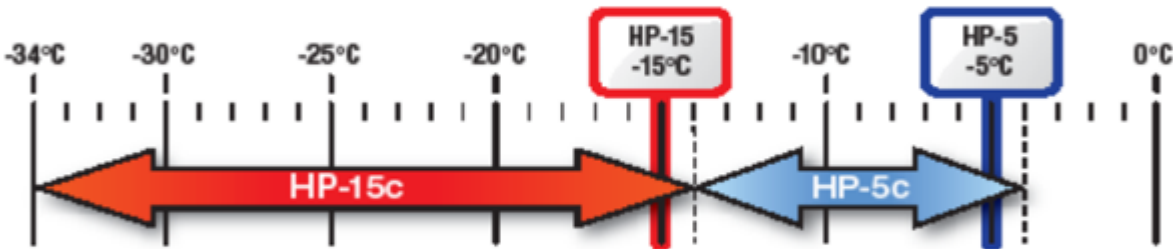

Last modification 11-01-2021 (d/m/y)